




Multimedia Active Speaker

T-250H

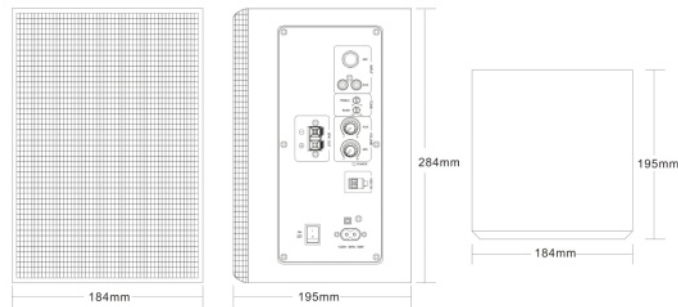

Description:

It suits for those places that need sound reinforcement such as multimedia classroom, conference room, training room, exclusive shop etc.

Features:

- * Line input, 1 mic input.
- * Output overload, short circuit protection.
- * Output 2 x 25W@4Ωload.
- * When mic input, it has silent sound function.
- * It is built-in 1 mic volume adjustment, 1 line input sound volume adjustment, 2 high-bass hidden volume adjustment.
- * With 100V broadcast input interface, priority over local broadcast.

Specifications:

Model	T-250H
Rated output power	2 x 25W
Impedance	4-8Ω
Input SPL	AUX: 350Mv±20MV; MIC : 5MV ±0.5MV
S/N Ratio	≥70dB
Frequency response	80~16KHz (±3dB)
Volume adjustment	1 MIC volume, 1 AUX volume
Harmonic distortion	≤1%
Operating temperature	5°C~40°C
Operating humidity	20%~80% relative humidity, non-condensing
Power consumption	≤60W
Voltage supply	~220-240V 50/60Hz
Dimension	200 x 210 x 300mm
Weight	6.8Kg