




Broadcasting Wall-mounted Speaker

T-865CFB

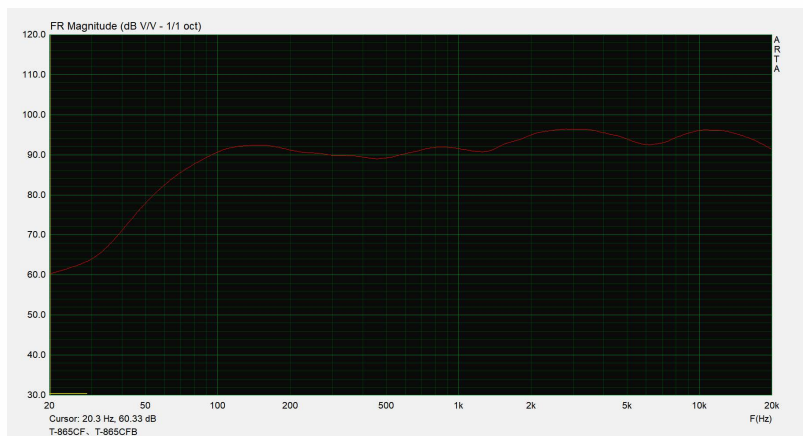

Feature:

- * The housing is made of polystyrene material, which is lightweight. And it is easy to install in various application scenarios.
- * The front panel adopts iron mesh decorative panel parts, which is beautiful and elegant.
- * Multi-angle adjustment of the mounting bracket, easy to adapt to various application scenarios.
- * Adopt a 5.25-inch mid-bass unit and a 25MM silk treble unit.
- * 5 fixed constant voltage volume adjustment switch.
- * Built-in high-quality linear audio power transformer.
- * It is widely used in various small and medium-sized meeting rooms, banquet halls, hotels, commercial buildings, schools, entertainment and leisure places.

Specifications:

Model	T-865CFB
Rated power (100V)	3W,6W,12.5W,25W,50W, 8 Ω
Rated power (70V)	1.5W,3W,6W,12.5W,25W, 8 Ω
Peak power	200W
Maximum SPL (rated/peak)	101dB/107dB
Frequency response	80Hz -20KHz
Sensitivity	84dB±-3dB
Speaker unit	5.25 inch mid-bass + 25MM silk treble
Dimensions (H x W x D)	376x202x184mmmm
Weight	4.1kg