



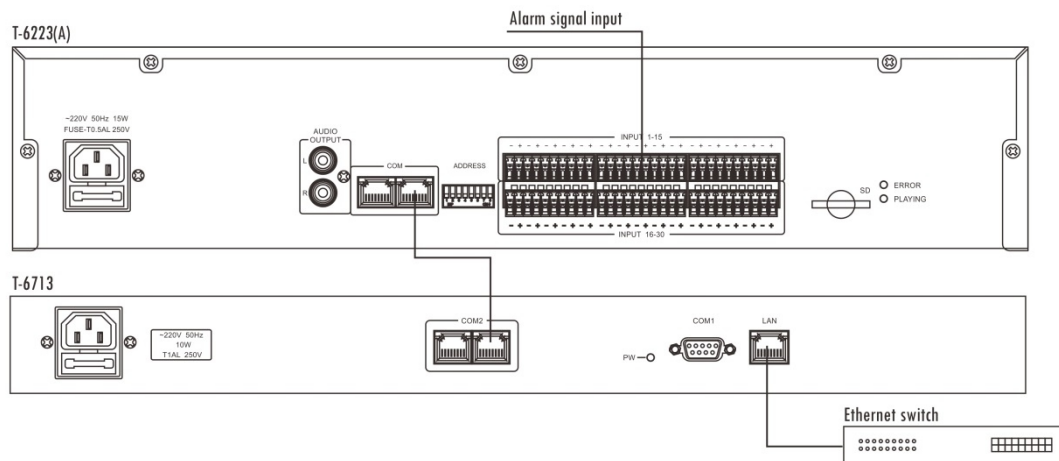

# Voice Alarm Intelligent Interface

## T-6223(B)

Embedded software: digital audio control embedded software V1.08

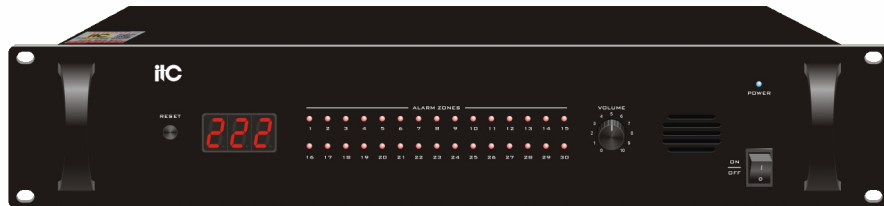

### Description

Collect short-circuit signal of fire service center, suitable for PA system that needs fire linkage alarm.

### Features

- \* Standard cabinet design (2U), black alumina brushed panel, handle designed, exquisite craft, showing high-end quality.
- \* Support 30 channels fire alarm signal connection and expandable to 300 zones.
- \* Address code can set alarm mode, support two kinds of alarm collection trigger mode: normally closed way and normally opened way.
- \* Accurate alarm zone LED display; built-in high-fidelity monitor speakers.
- \* Built-in digital voice alarm player to achieve independent zone voice alarm function.
- \* Adopt SD card to store alarm music, easy management, high-fidelity sound quality, random distribution of 8G SD memory card.
- \* With RJ45 communication interface, it can communicate data with the system controller, built-in alarm linkage interface and adjacent layer alarm algorithm, and realize flexible alarm functions such as whole area, zone, adjacent layer and so on.
- \* The standby power is less than 3W, which meets the national environmental protection and energy saving certification standards.

### Specifications

Model	T-6223(B)
Power Supply	~220V 50Hz
Power Consumption	15W
Communication Protocol	RS422
Communication Terminal	RJ45
Communication Speed	4800bps
Dimensions	484 x 303 x 88mm
Weight	4.20Kg