


Material: Aluminum shell and aluminum mesh

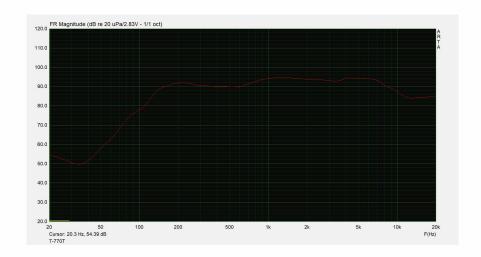

Features:

- * Dual-directional strong directional speaker with unique appearance design, composed of aluminum shell and aluminum mesh structure
- * Designed with two 6-inch full-range speaker units, the sound radiation angle is large, and the low frequency is full and the sound quality is clear.
- * Built-in high-performance copper wire audio transformer can reduce the loss caused by impedance in the circuit. It has multiple power options and can be set to a fixed resistance and a fixed voltage.
- * The upper and lower angles can be flexibly adjusted to facilitate user operation and installation.

Application:

Suitable for: Railway stations, bus stations, etc.

Specification

| Power Taps @100V | 5W, 10W, 20W |
|--------------------|--|
| Power Taps @70V | 2.5W, 5W, 10W |
| Impedance | Blue: Com Green: $2 \text{ K}\Omega$ Yellow: $1 \text{K}\Omega$ Red: 500Ω |
| Sensitivity | 92dB ±3dB |
| Max. SPL | 105dB ±3dB |
| Frequency Response | 110-15KHz |
| Speaker unit | 6" x 2 |
| Dimensions | Ф172×282mm |
| Weight | 2.94Kg |