




Portable Active Column Speaker

KS-12A35

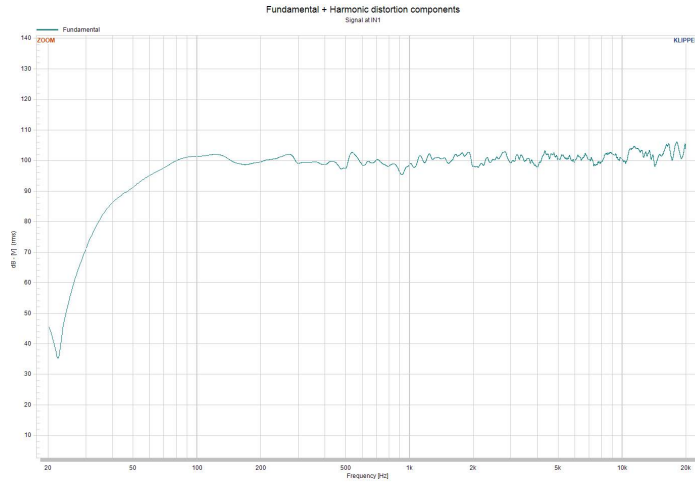

Description

It is used in mobile performances, small and medium clubs, auditoriums, banquet halls, multipurpose halls and various high-end occasions.

Feature

- * Adopt one 12-inch woofer and eight 3.5-inch mid tweeter drivers.
- * The woofer is made of 15mm thick birch plywood; the column speaker is made of 9mm thick birch plywood; the surface is sand-sprayed, high-grade and wear-resistant.
- * Active portable linear array speaker system contains powerful sound effect, portability, easy installation, high sound pressure level and a wide low frequency range.
- * The integrated woofer adopts a band-pass dual inverted design to provide the powerful bass effect; the mid tweeter adopts a phase plug line sound source design, while avoiding the bulky shape.
- * Built in DSP processing, optimized compression.

Specification

Model	KS-12A35
Rated power	600W+600W
Peak power	24 00W+ 24 00W
Crossover frequency	4th/200Hz, DSP electronic frequency division
Frequency range	40Hz-20KHz
Input port	2 XLR multi-function jack inputs, 1 stereo RCA input, 1 Bluetooth input, 1 XLR output
Function	Support low frequency boost, Bluetooth support TWS, support one-key noise reduction
Maximum SPL (rated/peak)	122dB/128dB
Voltage input	AC 220V 50Hz-60Hz
Coverage	140° (H) 40° (V)
Woofer	12" × 1
Mid tweeter	3.5" × 8
Net weight	25.5kg
Dimension (H×W×D)	Woofer: 625×365×450mm Column speaker: 800×103×180mm Support rod: 800×35×50mm
Total height	2000mm